Marketing 100+ Countries / Regions

PUSEN

Single Use Flexible Video Ureteroscope


PU3033AH





Gradual Lengthened Snake Bone Structure

Excellent flexibility and maneuverability and smaller bending radius for easier access to the calyx

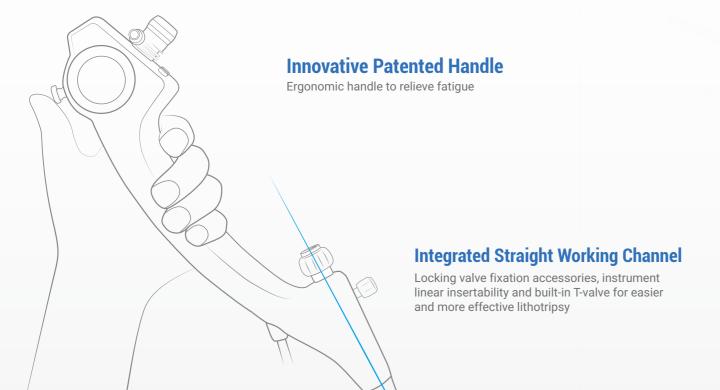

Suction Control



Improved surgeon control, lower the intrarenal pressure (IRP) and temperature (IRT), facilitated IRP and IRT maintaining in a safe threshold, reduced risks of postoperative infections and other complications, and minimized usage of accessories

Kink-Resistant Tube

In-Package Connecting Tube Connecting the irrigation port

Connecting the irrigation port with the irrigation system

Instrument Channel Port

Fiber fixation allowed

Integrated Suction Port

Specification

Insertion Tube Diameter	Bending Angle	Field of View	Minimum Instrument Channel Width
7.5 Fr (2.5mm)	U/D 270°	120°	3.6 Fr